


IPPWR16

16-Port Gigabit Poe+ Surge Protection

The IPPWR16 provides 16 channels of surge protection for network devices. It can be used with both PoE and non-PoE devices. The IPPWR16 is cost-effective and ideally suited for protecting multi-input devices such as network switches, NVRs, or groups of IP cameras or servers. The IPPWR16 is rack mountable in a standard 19" rack. It installs in minutes and provides a single easy access point for grounding.

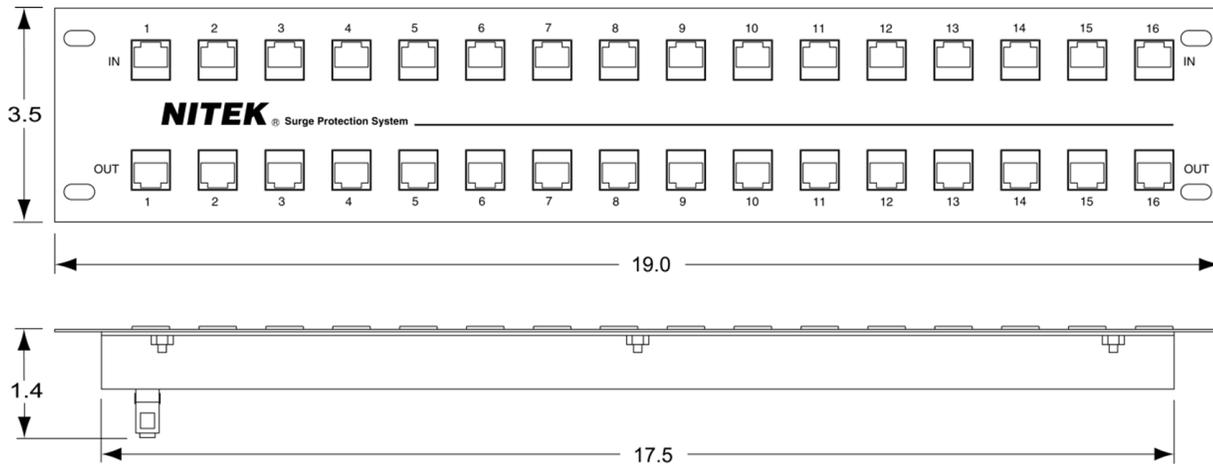

PRODUCT FEATURES

- Provides 16 channels of surge protection
- Works with 10/100/1000 Mbps equipment
- Supports PoE+
- 1 picosecond clamping time
- Uses only 2RU of 19" rack space
- Easy to set up and install
- Limited Lifetime Warranty
- Designed, tested, manufactured, and supported in the U.S.A.

TECHNICAL SPECIFICATIONS

Clamping

58Vp-p (on all lines)

Connectors

Standard RJ45

16 In - 16 Out

Transient Response Time

1 Picosecond typical

Peak Pulse Power Dissipation

3,000W/pair (10/100us)

Environmental/Temperature

Operating: -40°C to 85°C / -40°F to 185°F

Storage: -40°C to 85°C / -40°F to 185°F

Mechanical Dimensions (W x H x D)

19" x 3.5" (2RU) x 1.4" / 483mm x 89mm x 36mm

Shipping Dimensions

Size: 20" x 6" x 6" / 508mm x 152mm x 152mm

Weight: 1.7kg / 3.8lb