
# AMG2015 3U 12 SLOT 19-INCH RACK CHASSIS WITH SINGLE PSU



### Industrial 19inch Racks

The AMG2015 is a 3U rack chassis for standard 19 inch racks.

The rack allows for mounting up to 12x AMG 7HP (1 slot) wide units or any other combination of 14HP (2 slots) or 21HP (3 slots) wide units. A single PSU is inlcuded with up to 80W of power available.

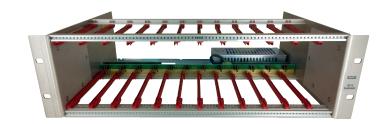







[ AMG2015 ]

#### / OVERVIEW

The AMG2015 rack chassis supports all AMG rack mount models including the AMG250R & AMG350R Industrial Media Converter range as well as models from the AMG3/4/5000R series of analogue video & data transmission.

Each rack supports up to 12 single slot 7HP wide units or any combination of larger width models and occupies only 3U of rack space within the equipment cabinet offering a simple and elegant rack mount solution for space restricted installations.

The rack includes a single integrated mains power supply and supports hot-swappable replacement of the AMG units. A second power supply can also be installed to create dual redundant power supply operation (for dual redundant use an additional AMG2015PS PSU must be purchased seperately or the rack can be ordered as an AMG2015-DR model with dual PSU included).

The integrated power supply supports a wide  $90-264V_{AC}$  input range and provides  $15V_{DC}$  @ 80W to power the installed AMG units.

#### / FEATURES

- Up to 12 slots for AMG 7HP, 14HP & 21HP Ethernet and analogue transmission products
- 19inch standard rack-mount size 3U high
- Hot-swappable replacement of AMG units
- Single 90-264VAC mains power input
- LED indication for power supply operation to aid installation and system fault diagnosis
- Compatible with any AMG250R or AMG350R model or any models from the AMG3/4/5000R series
- Fault relay for notification of power supply failure
- Manufactured in the United Kingdom
- AMG Lifetime Support Warranty



## Specifications.

Interface.

LED Indicators 1x Power

1x System Status

Capacity 12 Slots

Power Input 1x IEC C14 Socket

Power Output 12x AMG Card Connectors Fault Relay 1x 2 pin removable terminal

block

Power.

Power Inputs <sup>1</sup>

Operating Voltage 90-264V<sub>AC</sub>, 50~60Hz Input Current 1.5A (115V<sub>AC</sub>) / 0.9A (230V<sub>AC</sub>)

Efficiency >90%

Output  $12x 15V_{DC}$ , 80W Max

Fault Relay Form A

125V @ 0.15A Max

Environmental.

Operating Temp. -40°C to +75°C Storage Temp. -40°C to +85°C

Humidity 5% to 95% (non-condensing)

MTBF 834,000 hours

MTBF Standard MIL-HDBK-217F GB25
Heat Dissipation 273 BTU/h (excluding individual units)

Cooling Passive Cooling

Noise Level 0 dBA

Mechanical.

Housing Aluminium

Dimensions (W x D x H) Excluding 19inch Brackets

437 × 300 × 132 mm 17.20 × 11.81 × 5.20 in

Installation 19inch Rack (3U) Weight 2.95kg / 6.50lb

Packaging.

Shipping Weight 3.85kg / 8.49lb Dimensions (W x D x H)

600 × 430 × 260 mm 23.62 × 16.93 × 10.24 in

Regulatory.

Safety IEC/EN 62368-1

UL 62368-1

EMI EN55011/32 Level A Radiated EN55011/32 Level B Conducted

EMS EN61000-3-2, Class A

EN61000-3-3 EN61000-4-2 (ESD) EN61000-4-3 (RS) EN61000-4-4 (EFT) EN61000-4-5 (Surge) EN61000-4-6 (CS) EN61000-4-11 (Dips)

Environmental Reach, RoHS, WEEE

### Part Numbers.

AMG2015 12 slot rack chassis 19inch 3U high with single PSU

Recommended PSUs.

AMG2015PS Additional / Spare PSU For AMG2015 Racks, 15VDC, 80W

Notes.

Included Accessories 1x Region specific line cord (UK / EU / US plug type, depending on region)

Proud to be a British Manufacturer





