

VM-UHD28PA

SKU: 233024



28" (71cm) LCD Monitor, 4K UHD, 3840x2160, LED, USB, DisplayPort, 3xHDMI

Main Features

Professional 28"(71cm) LCD monitor	Built to run 24x7x365 continuously
Maximum resolution 4K UHD 3840x2160 pixels	Different video inputs DisplayPort, 3x HDMI
LED Back Light	Built-in speakers
High brightness, High contrast	Including stand
Perfect presentation through digital 3D filtering and noise reduction	Plastic housing

Specifications

Display:	
Display element	Colour TFT/LCD,Anti-Glare-Display,Hard coating (3H),Haze :25%
Screen size (inch)	28"
Screen size (cm)	71 cm
Aspect ratio	16:9
Backlighting	LED
Resolution Pixels	3840x2160
Contrast ratio typical	1000:1
Reponse time typical	5 ms
Refreh rate	60 Hz
Brightness typical	350 cd/m ²
Viewing angle vertical	178°

VM-UHD28PA

Continuation of the specifications


Viewing angle horizontal	178°
Pixel format	0,1617mm x 0,1617mm
Pixel fault class	ISO 13406-2, Class II
Functions:	
Comb filter	3D comb filter with de-interlace
Menu languages	English
Interfaces / Inputs/ Outputs:	
Video inputs (type)	3x HDMI,DisplayPort
Video inputs	HDMI 2.0,HDMI 1.4a,HDCP 1.4,HDCP 2.2
Audio inputs	1, 1x 3.5mm jack
General:	
Dimensions (HxWxD)	380,16x659,15x17,58mm
Weight	5kg
Mount	VESA standard 100x100mm
Housing material	metal / plastic
Housing color	black
Loudspeaker	2
Power consumption	40W
Supply voltage	100 ~ 240VAC, 50/60Hz
Operating temperature	-30°C ~ +85°C,@ Humidity 10%-90% (non-condensing)
Parts supplied:	
Parts supplied	manual,power cord,feet,IR remote controller,HDMI cable

Optional Accessory

SKU	Name	Description
224228	VM-LCDWMB1	Universal Wall Mount for LCD Monitors, 32" to 65", VESA support up to 35 kg max.

VM-UHD28PA

Technical Drawing

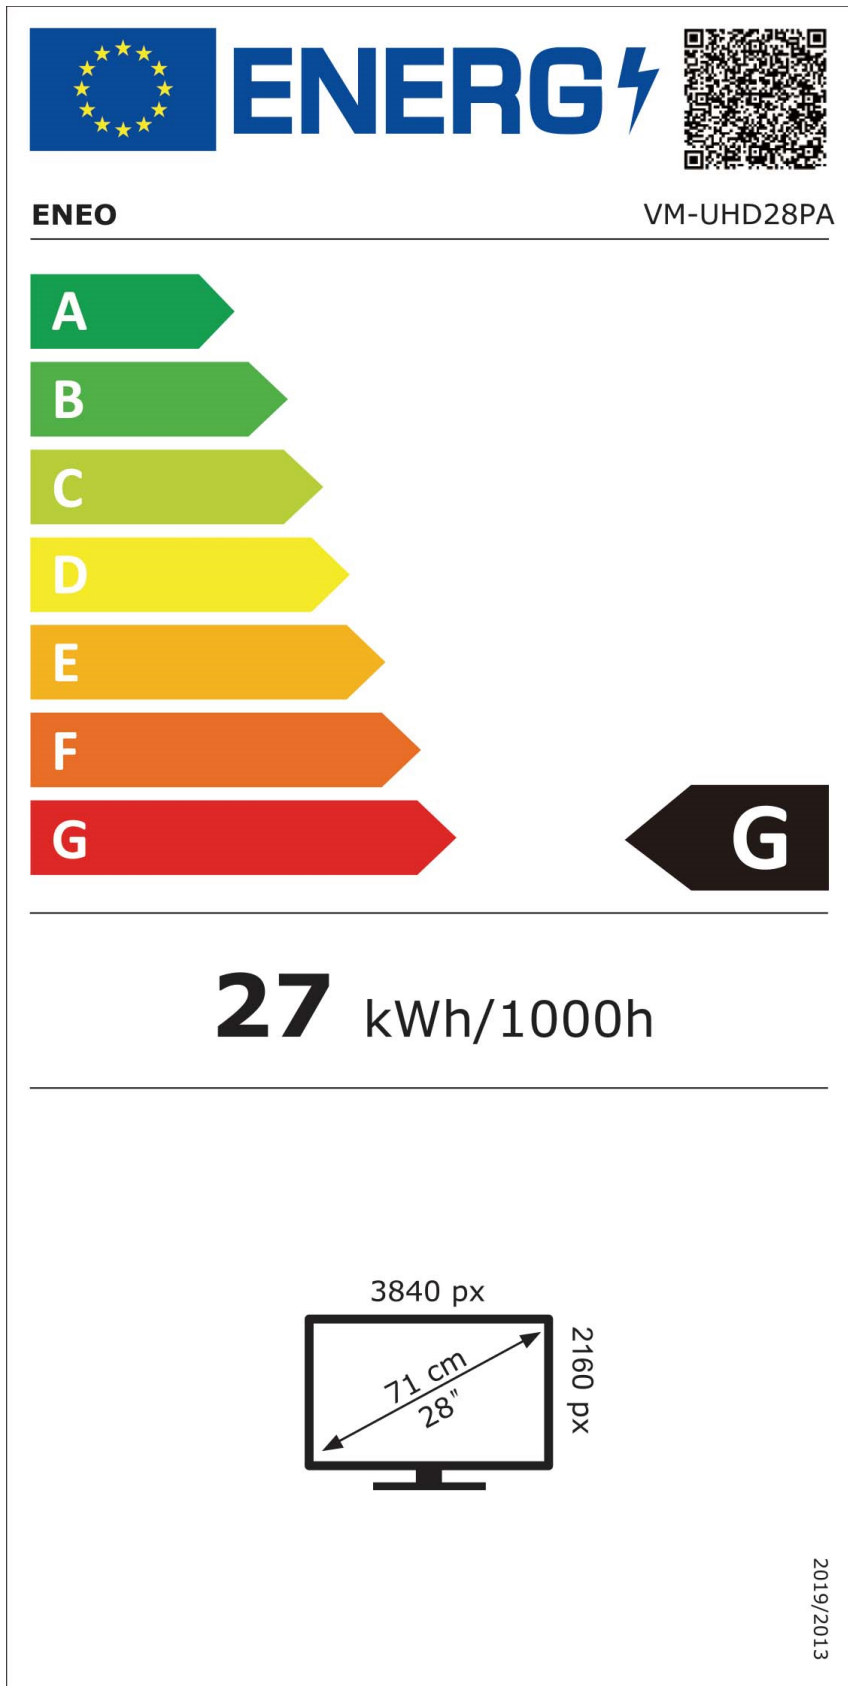

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

