

VM-HD19MPA

SKU: 233036



Abb. ähnlich

19" (48cm) LCD, Industrial Monitor, 1280x1024, HDMI, VGA, Composite, Protection Glass

Main Features

Professional 19" (48 cm) LCD monitor

Built to run 24x7x365 continuously (Industrial Level)

Including protection glass, Anti-Glare-Display 3H

Maximum resolution 1280x1024 pixels

LED Back Light

Fast response time 5ms

Different video inputs HDMI, VGA, BNC (CVBS)

Audio In- and Output

Built-in speakers

Metal cabinet including wall mount

Specifications

Video:	
Resolution	1280x1024,1024x768 ,800x600,640x480
Display:	
Display element	Colour TFT/LCD,Anti-Glare-Display,Haze: 89%,Protection Glass,Not anit-glare type,Hard coating (6.5H)
Screen size (inch)	19"
Screen size (cm)	48 cm
Aspect ratio	5:4
Backlighting	LED
Resolution Pixels	1280x1024
Contrast ratio typical	1000:1
Reponse time typical	14 ms

VM-HD19MPA

Continuation of the specifications


Refresh rate	60 Hz
Brightness typical	250 cd/m ²
Viewing angle vertical	178°
Viewing angle horizontal	178°
Pixel format	0.0976mm x 0.2928mm
Pixel fault class	ISO 13406-2, Class II
Video standard	PAL/NTSC
Functions:	
Comb filter	3D comb filter with de-interlace
Menu languages	English, German, Italian, French, Chinese
Interfaces / Inputs/ Outputs:	
Video inputs (type)	VGA, HDMI, composite (CVBS)
Video inputs	HDMI 1.4a, HDCP 1.4
Video outputs	Composite (CVBS)
Audio inputs	1, 1x 3.5mm jack
Serial interfaces	no
General:	
Dimensions (HxWxD)	340,6x401,28x49mm
Weight	4,1kg
Mount	VESA standard 100x100mm
Housing material	metal
Housing color	black
Loudspeaker	2
Power consumption	25W
Supply voltage	100 ~ 240VAC
Operating temperature	10°C ~ +40°C
Parts supplied:	
Parts supplied	manual, power cord, wall bracket, HDMI cable

Optional Accessory

SKU	Name	Description
224229	VM-LCDWMB2	Wall bracket for LCD monitors horizontal adjustable, support up to max. 8 kg
228560	VM-TSHA	Monitor stand high adjustable up to 130mm, for LCD-Monitors, 15-27 Inch, maximum 10Kg

VM-HD19MPA

Technical Drawing

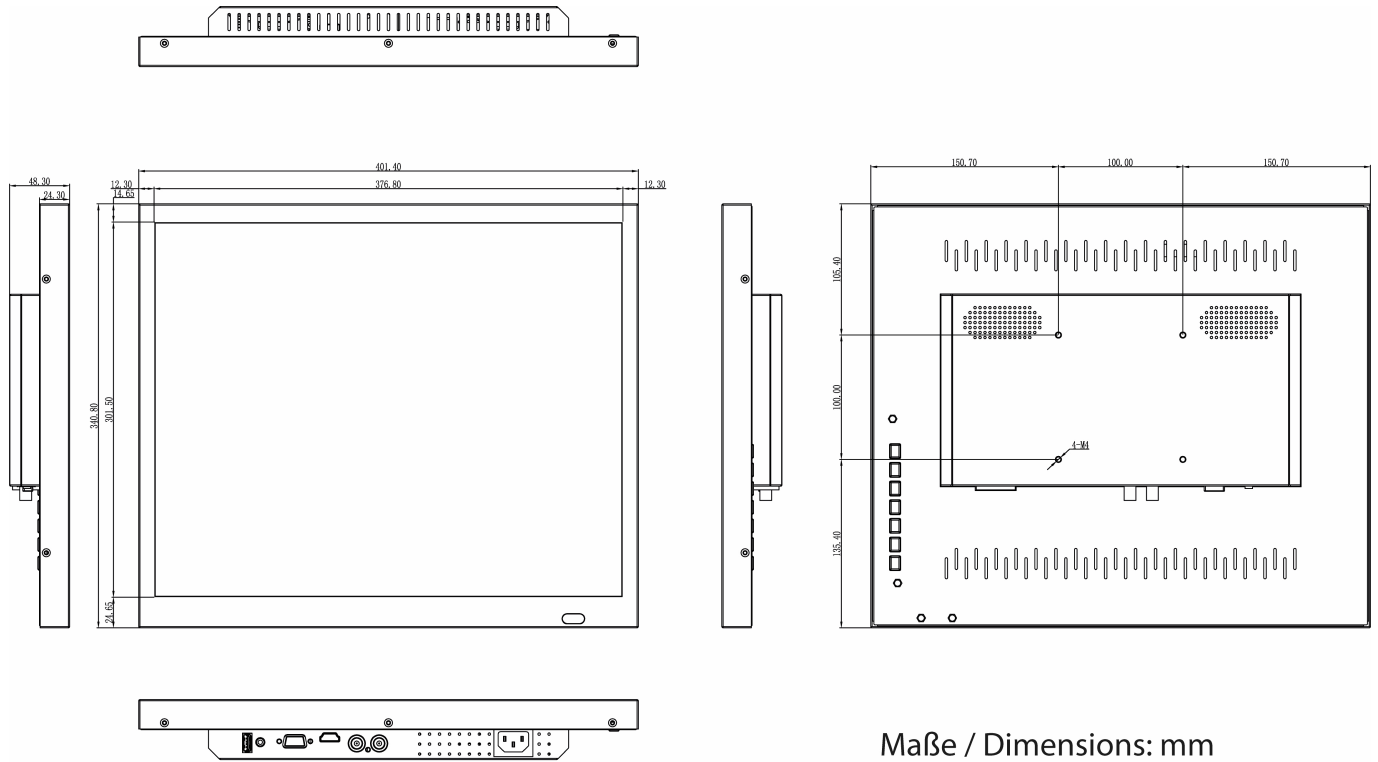

eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark, Deutschland

Phone: +49 6074 - 888 - 300
Fax: +49 6074 - 888 - 100
E-Mail: info@eneo-security.com
Web: www.eneo-security.com

Stay informed and subscribe
to the eneo newsletter

