



CPR700 housing cable managed

- ✓ Housing cable managed
- ✓ weatherproof rating IP66
- ✓ wall, ceiling, pole, corner mounting
- ✓ made entirely in aluminium
- ✓ easy fastening and positioning



CPR700

Cable managed housing


The housing cable managed model **CPR700** made entirely in aluminium combined to high quality materials and pleasant design make a product highly qualified for CCTV installation.

Available there are a wide range of accessories: cameras power supply, ventilation set, anti-tampering set, anticondensing glass, antibreaking glass, etc.

Suitable for most 1/2" 1/3" and 1/4" cameras with fixed focal lenses or compact zoom.

- DATA SHEET -

cable managed camera housing

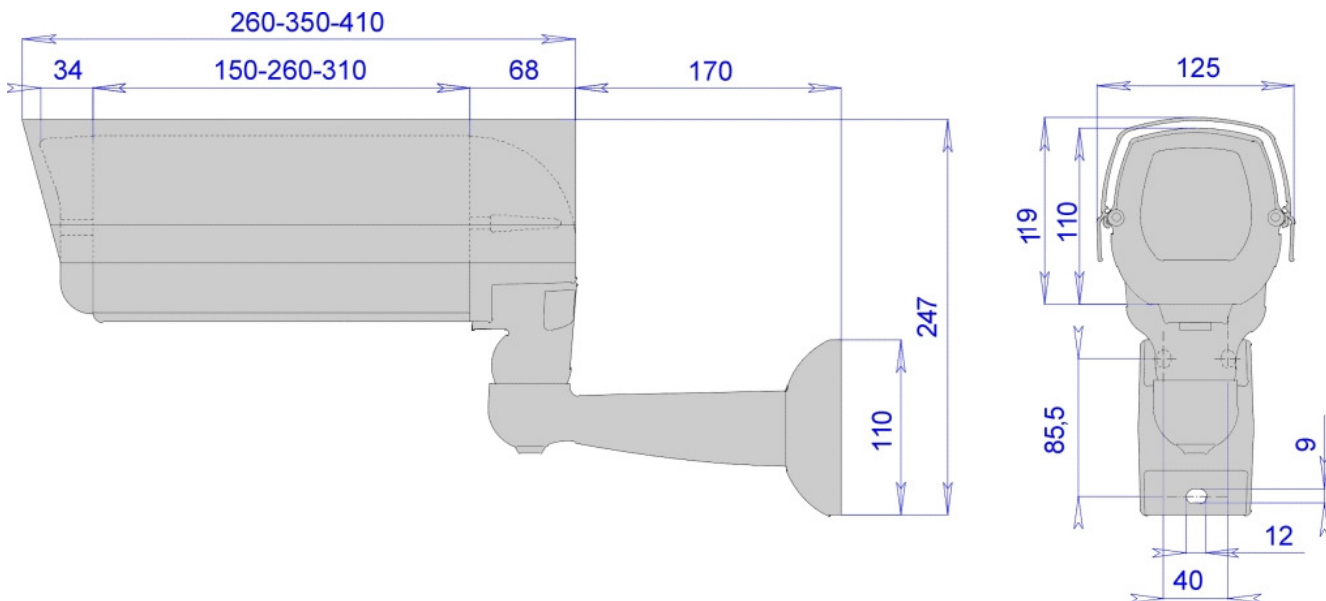

the values are in millimeters

TECHNICAL DATA

GENERAL

- body and sunshield made in aluminium
- painted with polyester powder RAL 7035 (light grey)
- stainless steel bolts and screws
- with silica-gel (anticondensing salt) and allen keys for opening
- extractable slide-out unit with looking system
- heater
- wide range of accessories
- supplied with instruction manual
- according to RoHS compliance

ELECTRICAL

- heater 230-110-24-12 Vac
consumption max. 30W
t on 15°C t off 22°C +/- 3°C
- ventilation 230Vac, 24Vac, 12Vac
consumption max. 1W
t on 37°C t off 27°C +/- 3°C
- power supply AL700/... :
AL700/A 230Vac -12Vdc 1,3A
AL700/B 230Vac -24Vac 400mA

MECHANICAL

- Usable internal space 80x72mm (WxH)
length 150-260-310mm.
- weatherproof rating IP66 (IP44 with VE700 external ventilation set)
- vandalproof protection IK10 (with VA700 antibreaking glass) EN 62262
- indoor/outdoor installations
- cable managed
- operating temperature from -20°C to +50°C
- weight 3 Kg. (on version 260mm KIT)

RELATED PRODUCTS

- STS700** ceiling bracket
- SP/A** pole adaptor
- SA/A** corner adaptor
- VI700** internal ventilation set
- VE700** external ventilation
- VC700** anticondensing glass
- VA700** antibreaking glass
- PA1** reinforcing support plate
- PA1/SD** reinforcing support plate in weatherproof box
- PS1** external power supply 230/12Vdc 400mA and 12Vac.
- PS2** external power supply 230/12Vdc 400mA
- PS3** external power supply 230/24Vac 400mA

Specifications are subject to change without notice, weights and dimensions are indicative.