CCTV EQUIPMENTS



DATASHEET

CSX900

AISI 316L big size stainless steel housing

- stainless steel AISI 316L housing
- wheaterproof rating IP67
- suitable for big size lenses
- high resistance to aggressive environments
- · easy fastening and positioning
- wide range of accessories





rear view



Large-size AISI 316L stainless steel housing

CSX900 BIG is an AISI 316L stainless steel housing, that has been developed to contain long-range cameras. The high quality materials and the large available internal space make this housing particularly suitable for critical environments such as industrial sites, marine areas or ports, where it is necessary to install long-range cameras with high corrosion resistance and high IP protection rating.

A wide range of accessories is available upon request: high power heater, camera power supply, built-in blower. CSX900 BIG is suitable for all the most common cameras, megapixel cameras, with various lenses (especially high-power zoom lenses).

Specifications are subject to change without notice, weights and dimensions are indicative


rev. 3020







DATASHEET

TECHNICAL DRAWINGS

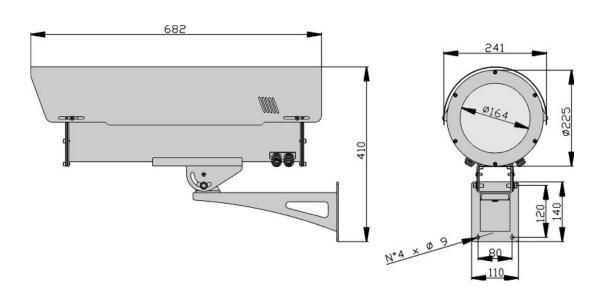

internal useful

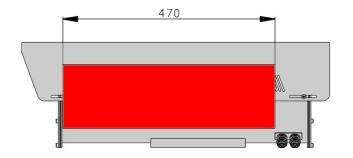



the values are in millimeters

Specifications are subject to change without notice, weights and dimensions are indicative.



CCTV EQUIPMENTS

DATASHEET

TECHNICAL DATA

GENERAL

- body made in stainless steel AISI316L
- sunshield in stainless steel AISI316L
- stainless steel A4 bolts and screws
- cable glands: no.4pcs. PG13,5
- wall bracket made in stainless steel AISI316L
- housing with easy opening system through front and back cover
- heater
- wide range of accessories
- supplied with instruction manual
- according to RoHS compliance

ELECTRICAL

heater

versions available: 230V-110V, 24V, 12V

consumption max. 60W t on 15°C t off 22°C +/- 3°C

• internal ventilation

versions available: 230V-110V, 24V, 12V

consumption max. 1W

t on 37°C t off 27°C +/- 3°C

MECHANICAL

- usable internal space 141x141mm (WxH) or Ø 172
- useful lenght: 470mm
- glass window Ø 164mm
- weatherproof rating IP67
- indoor/outdoor installations
- operating temperature with heater ON: from -20°C to +60°C (with double heater from -40°C to +60°C)
- weight 12 Kg. (KIT version with wall bracket included)

ACCESSORIES

RD900/A double heater 230-110Vac 120W RD900/B double heater 12-24Vac-dc 120W

AL900/A 230-110Vac -12Vdc 1,3A **AL900/B** 230Vac -24Vac 400mA **VI900** built-in internal ventilation

RELATED PRODUCTS

SP/C AISI 316L pole adaptor SA/C AISI 316L corner adaptor

model	unit weight (Kg.)	package dimensions (cm.) WxHxL	package weight (Kg.)
CSX900 +	12 (tot.)	26,0x26,0x70,0	12,40 (tot.)
ST160	, ,	19,0x15,0x46,0	,

Specifications are subject to change without notice, weights and dimensions are indicative

rev. 3020