



TELECOM & SECURITY


be able with cable



PRODUCT DATASHEET

KBM-HD


CaP System
BNC MALE CONNECTOR
HIGH DEFINITION: R. L. > 26.02 dB

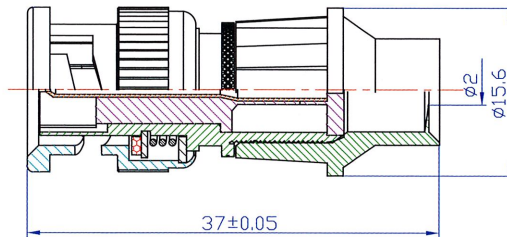


Use
these Tools



Stripping Dimension:

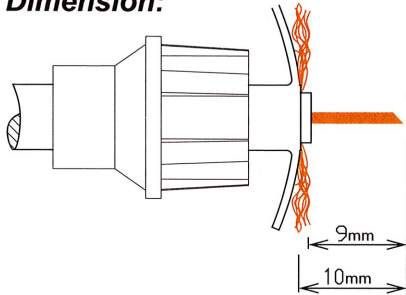

Return Loss: > 26.02 db @ 3 GHz

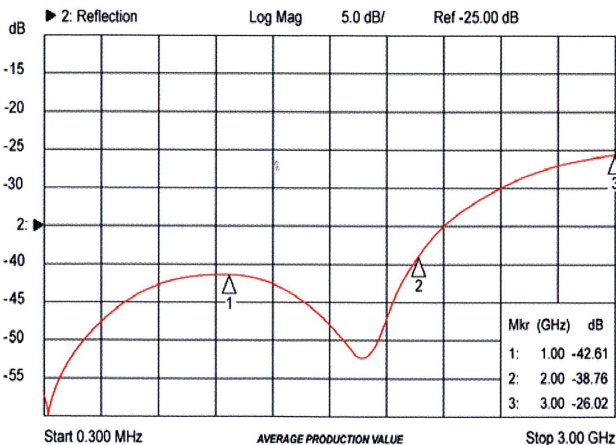

Suitable for:

Cables: RG6 quad, RG6, RG59, RG178, ... suitable for all cable with inner conductor from Ø 0,3 up to Ø 1,1 mm (from AWG 28 to AWG 18);

Protocols: HDCVI, HDTVI and AHD

Electrical Specification

Impedance: 75 Ohm
Frequency: 0-3 GHz
Return Loss: > 26.02 db @ 3 GHz
Dielectric W/V: 500 Veff
Insulation res: 5000 M-Ohm
Screening Immunity: Class A+

Mechanical Specification

Body Material: Brass - Nickel plated
Center Contact: Beryllium Copper - Gold plat.
Insulator: HDPE
Bayonet Cap: Zinc - Black Nickel plated
Gasket: Rubber
Washer: Fe - Nickel plated
Spring: SK5 - Nickel plated
Inner Retaining Ring: Fe - Nickel plated
CaP®: Protected Plastic Compound
Weight: 9.4 g

Environmental Specification

Operating Temp: - 40 ÷ + 120 °C