

DATASHEET

CSX900

AISI 316L big size stainless steel housing

stainless steel AISI 316L housing

weatherproof rating IP67

suitable for big size lenses

high resistance to aggressive environments

easy fastening and positioning

wide range of accessories



IP 67
STANDARD



rear view



Large-size AISI 316L stainless steel housing

CSX900 BIG is an AISI 316L stainless steel housing, that has been developed to contain long-range cameras. The high quality materials and the large available internal space make this housing particularly suitable for critical environments such as industrial sites, marine areas or ports, where it is necessary to install long-range cameras with high corrosion resistance and high IP protection rating.

A wide range of accessories is available upon request: high power heater, camera power supply, built-in blower.


CSX900 BIG is suitable for all the most common cameras, megapixel cameras, with various lenses (especially high-power zoom lenses).

DATASHEET

TECHNICAL DRAWINGS



internal useful

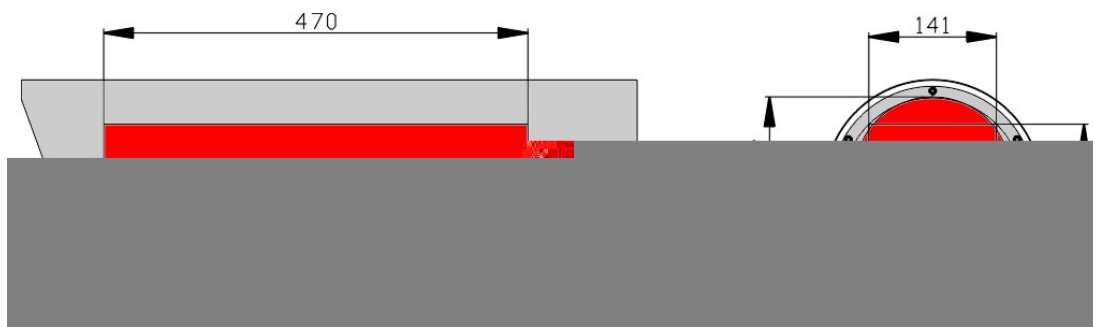

DATASHEET

TECHNICAL DATA

GENERAL

body made in stainless steel AISI316L
 sunshield in stainless steel AISI316L
 stainless steel A4 bolts and screws
 cable glands: no.4pcs. PG13,5
 wall bracket made in stainless steel AISI316L
 housing with easy opening system through front and back cover
 heater
 wide range of accessories
 supplied with instruction manual
 according to RoHS compliance

ELECTRICAL

heater
 versions available: 230V-110V, 24V, 12V
 consumption max. 60W
 t on 15°C t off 22°C +/- 3°C
 internal ventilation
 versions available: 230V-110V, 24V, 12V
 consumption max. 1W
 t on 37°C t off 27°C +/- 3°C

MECHANICAL

usable internal space 141x141mm (WxH) or Ø 172
 useful lenght: 470mm
 glass window Ø 164mm
 weatherproof rating IP67
 indoor/outdoor installations
 operating temperature with heater ON: from -20°C to +60°C
 (with double heater from -40°C to +60°C)
 weight 12 Kg. (KIT version with wall bracket included)

ACCESSORIES

RD900/A double heater 230-110Vac 120W
RD900/B double heater 12-24Vac-dc 120W
AL900/A 230-110Vac -12Vdc 1,3A
AL900/B 230Vac -24Vac 400mA
VI900 built-in internal ventilation

RELATED PRODUCTS

SP/C AISI 316L pole adaptor
SA/C AISI 316L corner adaptor

model	unit weight (Kg.)	package dimensions (cm.) WxHxL	package weight (Kg.)
CSX900 + ST160	12 (tot.)	26,0x26,0x70,0 19,0x15,0x46,0	12,40 (tot.)